


Connection Cable (shielded)

(for fire extinguishing generators of types: Dynameco 50-E03)

Type: Dynameco AK1 ...

All rights strictly reserved except when stipulated otherwise expressly by contract. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietors.

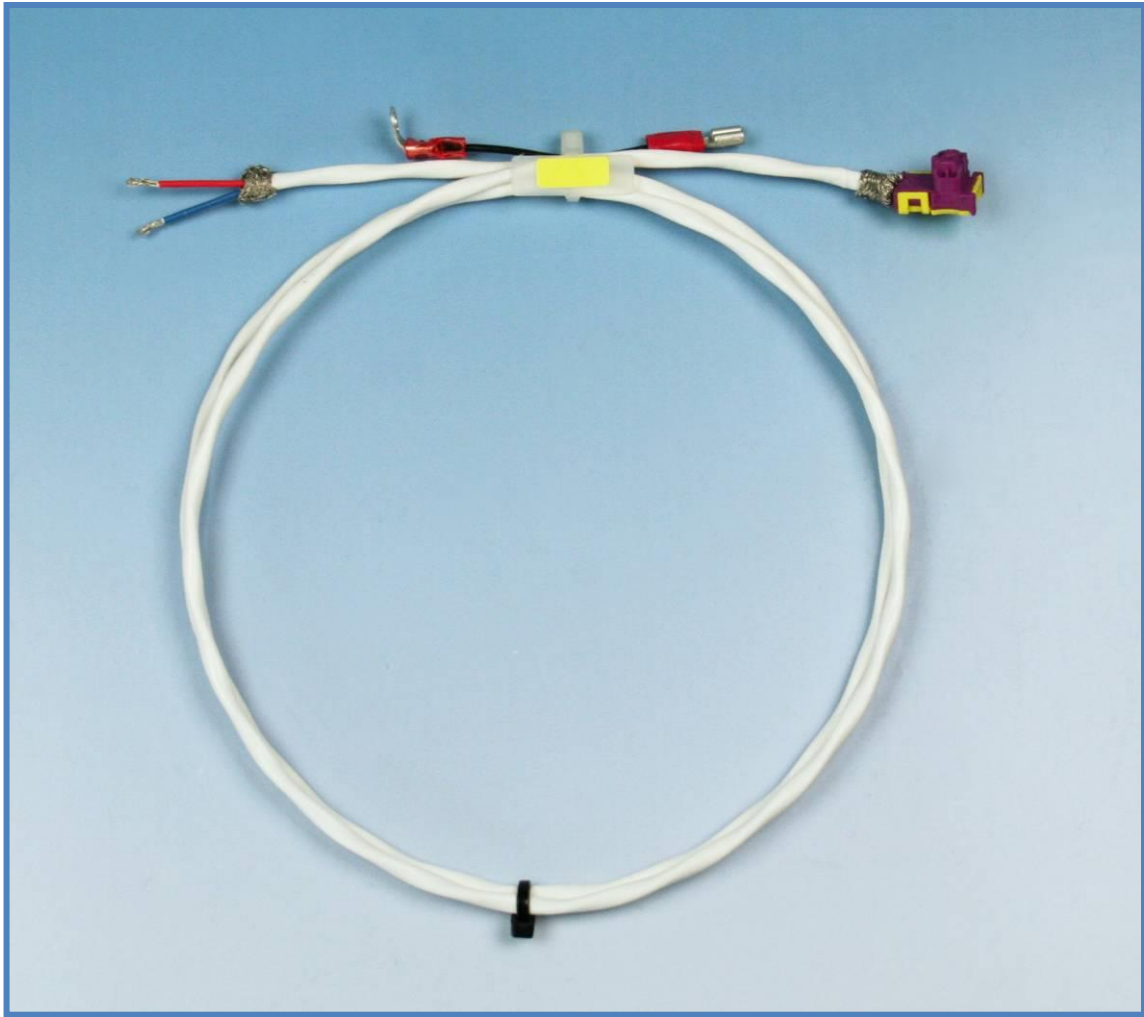

Characteristics:

- Manufacturer: EGON HARIG GmbH
- Connection cable, shielded, 2.5 m
Type: Dynameco AK1 25
P/N: 50 398
- Connection cable, shielded, 5 m
Type: Dynameco AK1 50
P/N: 50 402
- Connection cable, shielded, 10 m
Type: Dynameco AK1 100
P/N: 50 403
- EMC protected
- suitable for connection to the
AEROSOL Fire Extinguishing Generator
type: Dynameco 50-E03
- optional accessories:
Test Unit
Type: Dynameco PSDY06
P/N: 80 374

Technical Data:

Connection socket (squib connector)

Housing material:	PA
Contact material:	tin-coated copper, sel. gold plat.
Connection:	2-pole
Secure closure:	latching hook (self-locking)
EMC protection:	ferrite
Operating temperature range:	-40°C to +90°C

HT-connection cable

Cable type:	2-wire, twisted, shielded
Conductor cross sections:	2 x 0.62 mm ² (AWG 20)
Conductor material:	tin-coated copper
Conductor types:	fine-wire
Outer diameter:	3.76 mm
EMC protection:	shielding braid
Operating temperature range:	-65°C to +150°C

Alle Rechte, soweit nicht vertraglich anders vereinbart, sind ausdrücklich vorbehalten. Vervielfältigung oder Mitteilung an Dritte, gleichgültig in welcher Form, ist ohne schriftliche Genehmigung des Eigentümers nicht gestattet.

Date

25/02/2020

Version

2

EGON HARIG GmbH
Gewerbering 4 • D-22113 Oststeinbek
Tel./Phone: +49 (0)40 713752-0
Telefax: +49 (0)40 713752-24
E-Mail: egonharig@egonharig.de
www.egonharig.de www.flamtron.de

Catalog sheet No

4.14011-1

Page 1 of 1