


Fire protection control unit

TKZ: 80833

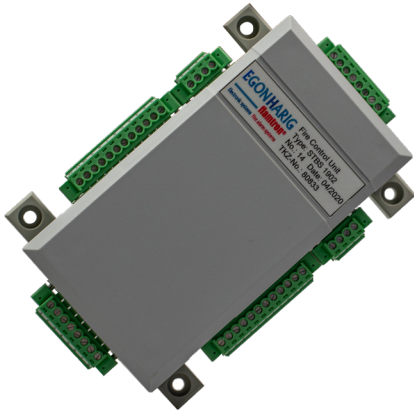


The small and compact fire protection control unit STBS 1902 with 12 V DC or 24 V DC power supply finds its place optimally in control cabinets.

Two detection lines in 1- or 2-line dependence monitor the extinguishing area. In case of a detection, the default signalling elements will indicate a pre- and release alarm. With the release the fire extinguishing generators trigger without delay.

Product features:

- 12 V DC or 24 V DC Operating voltage
- 2 detections lines in 1- or 2-line dependence
- Up to 4 fire extinguishing generators
- Up to 8 signalling elements
- Up to 2 manual release

Dimensions			Drill hole-		
Length	Wide	Height	Spacing		Diameter
l	b	h	e1	e2	∅
147 mm	93.2 mm	34 mm	104 mm	80 mm	4.5 mm

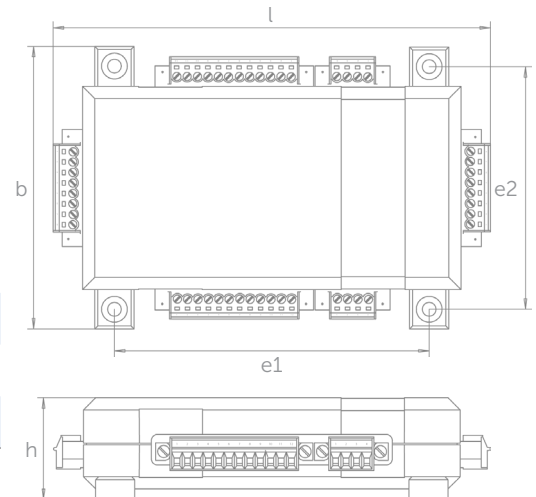

Weight	approx. 0.18 kg
Operational temperature range	-10 °C to +60 °C
Protection class	IP 20
Operating voltage	24 V DC or 12 V DC
Detection line	2 x in 1- or 2-line dependence
Release circuit fire extinguishing generators (of types)	- 4 x Dyanemeco ...-E02 or - 2 x Dyanemeco ...-E03 or - 2 x FirePro ...
Output connections for:	
"Alarm"-message	2 x potential-free changeover contact
"Operation / Alarm"	2 x Duo-LED 12 V DC (green / red)
"Release initiated"	4 x terminal 12 V DC / max. 100 mA

Accessories



EH-SMFE22214
 Duo-LED - two-tone (red / green)
 TKZ: 21105



EH-LHDC-105°C-2
 Linear Heat Detection Cable 105 °C, 2 pole
 TKZ: 50460